

LINEAR WALLWASHER

LRW 24-Mono



YYZ LRW is wall washer series linear light of new solution for large scale with high brightness architectural illumination. Its streamline design and aluminum profile along with adjustable brackets make it an elegant solution for wall washing and grazing applications. This IP66 rated modular system is available in 300mm, 500mm, or 1000mm lengths and can be customized as per project situations. Its integrated design of heat dissipating structure and degassing valve make it suitable for exterior architectural, retail and hospitality applications.



FEATURES

FINISH	6063 Aluminum
WORKING VOLTAGE	24V dc
RATED POWER	11W/mtr
BEAM ANGLE	30°, 45°, 25°x45°
MOUNTING	Surface mounting
OPTIC	PC
DIMENSIONS	1000(L) x 24.5(W) x 63.2(H)mm
OPERATION TEMP	-25° C - +50° C
STORAGE TEMP	-40° C - +80° C
WEIGHT	0.8kg
LAMP LIFE	50000 hrs
BODY COLOR	Black, Grey, White, Green
CONTROL	Dmx512

CREE
LED Quality


24V DC
Working Voltage

11W/ mtr
Rated power

ELECTRICAL DATA

SUPPLY VOLTAGE	24V dc
COLORS	2700K, 3000K, 4000K, 5000K, 6000K
LUMEN	45-52.5lm/W

DIMENSION

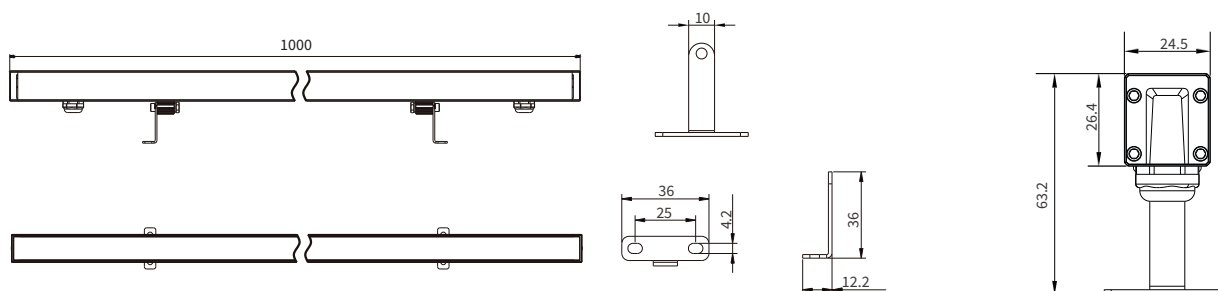

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAMANGLE	BODY COLOR	CUSTOM
LRW24	11 - 11W	(CT27) 2700K	DC - 24VDC	30 - 30°	BK - Black	XX - XXX
		(CT30) 3000K		45 - 45°	GR - Grey	
		(CT40) 4000K		25x45 - 25°x45°	WH - White	
		(CT50) 5000K			GN - Green	
		(CT60) 6000K				

Sample: LRW24 - 11 - CT27 - DC - 30 - BK - XX