

LINEAR WALLWASHER

LRW 22C-Mono



YYZ LRW is wall washer series linear light of new solution for large scale with high brightness architectural illumination. Its streamline design and aluminum profile along with adjustable brackets make it an elegant solution for wall washing and grazing applications. This IP66 rated modular system is available in 300mm, 500mm, or 1000mm lengths and can be customized as per project situations. Its integrated design of heat dissipating structure and degassing valve make it suitable for exterior architectural, retail and hospitality applications.



FEATURES


FINISH	6063 Aluminum
WORKING VOLTAGE	24V DC
RATED POWER	7W, 12W/mtr
BEAM ANGLE	30°, 45°, 25°x45°, 120°
MOUNTING	Surface mounting
OPTIC	PC
DIMENSIONS	1000(L) x 22(W) x 28.8(H)mm
OPERATION TEMP	-30° C - +50° C
STORAGE TEMP	-40° C - +80° C
WEIGHT	0.6kg
LAMP LIFE	50,000 hrs
BODY COLOR	Aluminum color
CONTROL	On/Off



ELECTRICAL DATA

SUPPLY VOLTAGE	240V ac
COLORS	2700K, 3000K, 4000K, 5700K
LUMEN	48lm/W

DIMENSION

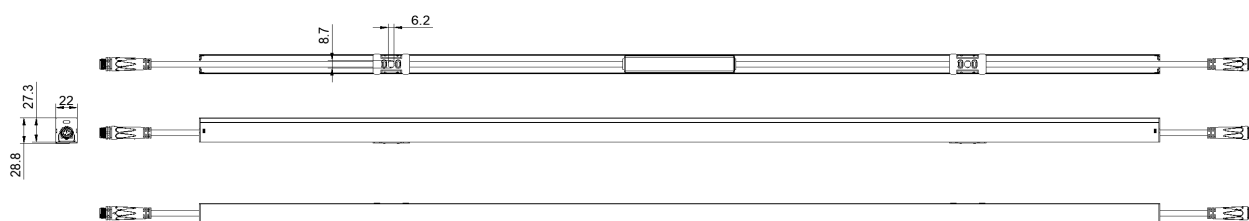

ORDERING LOGIC

PRODUCT	WATTAGE	COLOR TEMPERATURE	VOLTAGE	BEAMANGLE	BODY COLOR	CUSTOM
LRW 22C	7 - 7W	(CT27) 2700K	DC - 24V DC	30 - 30°	AL - Aluminum	XX - XXX
	12 - 12W	(CT30) 3000K		45 - 45°		
		(CT40) 4000K		25x45 - 25°x45°		
		(CT57) 5700K		120 - 120°		

Sample: LRW 22C - 12 - CT27 - DC -30 - AL - XX