

LFC GRAZER OUTDOOR SPEC SHEET



LFC-G-0



IP67
WATER
PROOF



4.8W
7.2W
9.6W
12W

The LFC Series Grazers are a simple, yet certain solution for outdoor wall-washing and grazing applications. They project a consistently crisp wash of light to accentuate wall textures. With precise beam control and power options, chances are that you'll find the "sweet spot" for the application.



FEATURES

OPERATING VOLTAGE	105 – 277 VAC
OPERATING TEMPERATURE	-20°C to + 50°C
LIGHT SOURCE	Top quality surface mount LED with variable drive current
COLOR RANGE	Single Color Operation / Custom Color Operation
BEAM ANGLE	13°, 18°, 30°, 45°, 60°, 15°x45°
FIXTURE CONNECTION	Circular Waterproof connector
AVAILABLE IP RATING	IP-67
CRI	80





ELECTRICAL DATA

Power	4.8 W	7.2 W	9.6 W	12 W
Lumen (5000 K)	510 lm	750 lm	970 lm	1200 lm
Amp/ft (@120V)	50 mA	75 mA	100 mA	120 mA
Amp/ft (@230V)	25 mA	38 mA	50 mA	60 mA
Maximum Daisy Chain @ 120 V	175 ft / 50 m	115 ft / 30 m	85 ft / 25 m	70 ft / 20 m
Maximum Daisy Chain @ 230 V	340 ft / 100 m	225 ft / 65 m	160 ft / 50 m	140 ft / 40 m

COLOR TEMPERATURE DATA

Colors	4.8 W Lumens/ft	7.2 W Lumens/ft	9.6 W Lumens/ft	12 W Lumens/ft
2200K	380 lm	560 lm	720 lm	880 lm
2700K	500 lm	720 lm	930 lm	1,150 lm
3000K	500 lm	720 lm	930 lm	1,150 lm
3500K	500 lm	720 lm	930 lm	1,150 lm
4000K	500 lm	720 lm	930 lm	1,150 lm
5000K	510 lm	750 lm	970 lm	1,200 lm
5700K	510 lm	750 lm	970 lm	1,200 lm
6000K	510 lm	750 lm	970 lm	1,200 lm
6500K	510 lm	750 lm	970 lm	1,200 lm
BLUE	120 lm	160 lm	210 lm	250 lm
GREEN	370 lm	510 lm	610 lm	710 lm
RED	200 lm	300 lm	400 lm	500 lm
AMBER	230 lm	350 lm	440 lm	520 lm


LENGTH OPTIONS

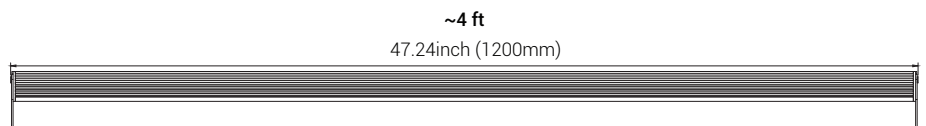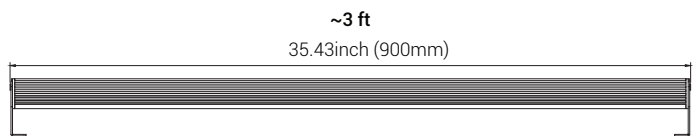

7 LEDs /ft
LED Quantity

V AC Mains
Operating Voltage

W 4.8W / 7.2W / 9.6W / 12W
Rated power

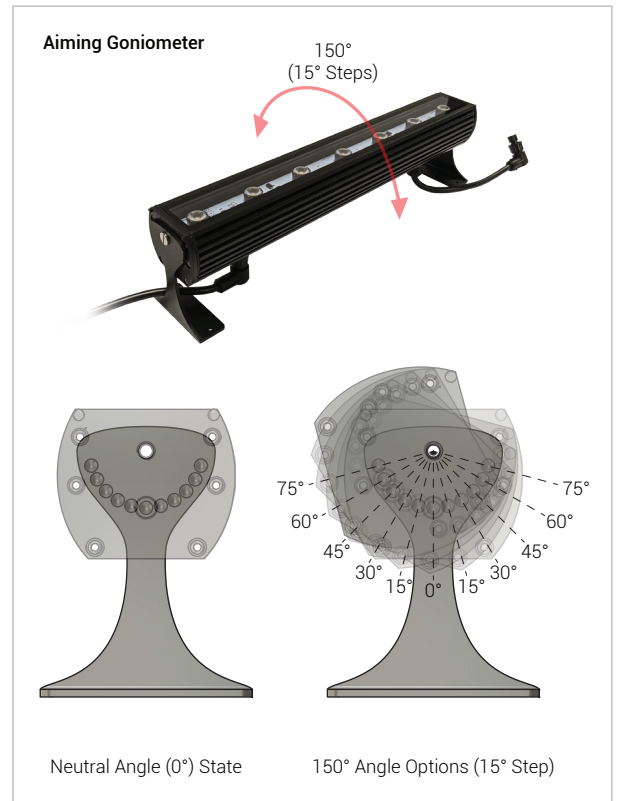

LFC GRAZER OUTDOOR SPEC SHEET

LFC-G-0

ORDERING LOGIC

SERIES	TYPE	LOCATION	POWER	COLOR TEMPERATURE	LENGTH	OPTICS	FINISH	MOUNTING	CONNECTOR
LFC	G-Grazer	O-Outdoor	4.8W - 4.8WATTS	(CT 22) 2200K	12 - 12inch / 300mm	13 - 13°x13°	BK - Black (Standard)	SB - SWIVEL BRACKET	IP - IP CONNECTOR
			7.2W - 7.2WATTS	(CT 27) 2700K	24 - 24inch / 600mm	18 - 18°x18°			
			9.6W - 9.6WATTS	(CT 30) 3000K	36 - 36inch / 900mm	30 - 30°x30°			
			12W - 12.0WATTS	(CT 35) 3500K	48 - 48inch / 1200mm	45 - 45°x45°			
				(CT 40) 4000K		60 - 60°x60°			
				(CT 50) 5000K	15x45 - 15°x45°				
				(CT 57) 5700K					
				(CT 60) 6000K					
				(CT 65) 6500K					
				(CT BL) BLUE					
				(CTGR) GREEN					
				(CTRD) RED					
(CTAM) AMBER									

Sample: LFC-G-0-4.8W-CT24-12-13-BK- SB-IP

DIMENSIONS

