

CIANA ECO SERIES

CNA ECO

Mono IP20 CE

YYZ Ciana ECO series is a surface/ suspension mounted luminaire with extruded aluminium housing, with PMMA diffuser as optic. Options of Direct/ Indirect component makes it Ideal for varied commercial spaces, particularly for office lighting applications.



FEATURES


HOUSING	100% Recyclable, extruded architectural grade T6061 aluminium
BEAM ANGLE	120°
MOUNTING	Surface, Suspended
OPTIC	PMMA
DIMENSIONS	50x75x1200mm
OPERATION TEMP	-20° C - +50° C
LAMP LIFE	50,000 hrs
CONTROL	Non-Dimmable, Dali, 1-10V

- BRIDGELUX
LED Quality
- 100-285V AC
Working Voltage
- 33W/Mtr
Rated power

ELECTRICAL DATA

RATED POWER	33W/m
COLORS	3000K, 4000K, 6500K
CRI	80
LUMEN	120 lm/W

DIMENSION

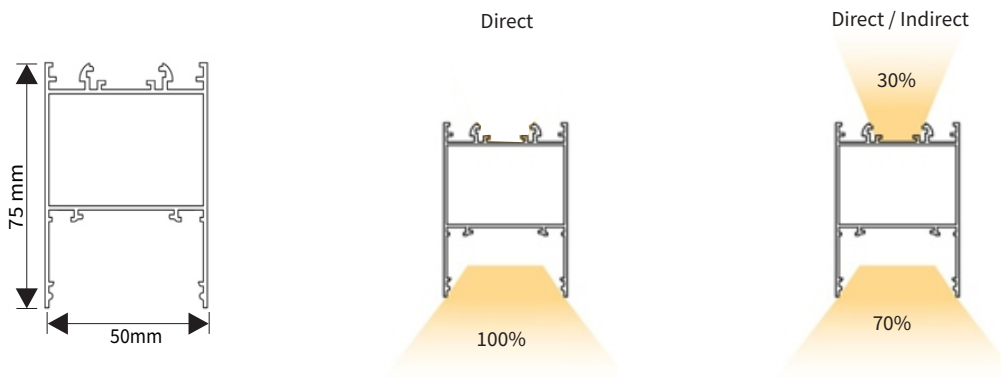

ORDERING LOGIC

PRODUCT	DISTRIBUTION	WATTAGE	COLOR TEMPERATURE	VOLTAGE	FINISH	MOUNTING	LENGTH
CNA ECO	DI - Direct	33 - 33W/Mtr	(CT30) 3000K	AC- 100-285V AC	AL - Aluminium natural	SM - Surface mounted	60 - 600mm
	D/I - Direct/Indirect	XX - Custom	(CT40) 4000K		BK - Black	SU - Suspended	120 - 1200mm
			(CT65) 6500K		WH - White	180 - 1800mm	
			(CTXX) Custom		GR - Grey	240 - 2400mm	
			XX - Custom		XX - Custom	XX - Custom	

Sample: CNA ECO - DI - 33 - CT30 - AC - AL SM - 60